2MP Analog HD Module

VNX-2E32

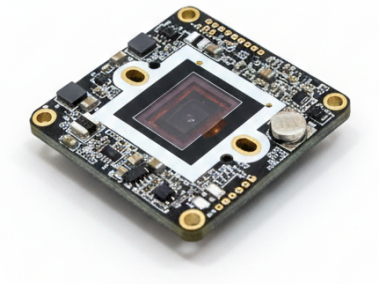

Product Highlight

- 1/2.9” 2.1MP SONY Progressive Scan Color CMOS Sensor
- HD-SDI, EX-SDI / AHD, TVI, CVI, CVBS
- DWDR
- 2DNR & 3DNR
- ACE
- 32mm x 32mm

Dimensions





	VNX-2E32	
Imaging Sensor	1/2.9" 2.1Megapixel COMS (IMX307)	
Scanning System	Progressive Scan	
Number of effective pixels	1985 x 1105 (2.19 MP)	
Total number of pixels	2001 x 1121 (2.24 MP)	
S/N Ratio	More than 50dB	
Video Output Mode	1920 x 1080 @ 25/30fps	
Video Output Level	HD-SDI, EX-SDI (2.0) / AHD, TVI, CVI, CVBS	
Min. Illumination	0.1 Lux (Color) , 0.01 Lux (BW) , 0.02Lux @ Sens-up x32	
O.S.D	Built-in	
Electronic Shutter Speed	AUTO / FLICKER / MANUAL	
	NTSC: 1/30 – 1/30,000 sec	PAL: 1/25 – 1/25,000 sec
AGC	0 – 10 Step	
Sens-up	OFF / x2 / x4 / x8 / x16 / x32	
ACE	OFF / LOW / MIDDLE / HIGH	
DEFOG	ON / OFF	
Backlight Compensation	OFF / BLC / HLC / WDR	
White Balance	AUTO / AUTOext / PRESET / MANUAL	
Day & Night	AUTO / COLOR / BW / EXTTRN	
DNR	OFF / LOW / MIDDLE / HIGH	
Focus Adj	On / Off	
Motion Detection	On / Off (4 ZONE)	
Privacy Masking	On / Off (16 ZONE)	
Language	ENGLISH / CHINESES / JAPANESE / KOREAN	
Supplied Voltage	DC12 ± 10%	
Power Consumption	Max. 1.32W [110mA]	
Dimensions	32mm x 32mm x 1.2mm(t)	

ViginNest VISION