

# IP - 5MP BULLET Camera

## VN7B-5N66E




### Features

- 1/2.8" Sony STARVIS CMOS Sensor
- Progressive Scan
- Total Number of Pixels: 2704 x 2104 (5.69 MP)
- 5 MP, 1944p @ 30 fps
- H.265, H.264, MJPEG
- IP Network
- Web Server Built-in
- 3DNR / Digital WDR
- ONVIF Compatibility
- PoE support

### Physical

- 2.7-13.5mm (F1.4) Motorized Varifocal Lens
- Aluminum Die Casting
- White Color (Option: Dark Grey)
- Ø77mm Bullet Housing
- Lens Option: 3.6mm Fixed Lens (F2.0)

### Dimensions

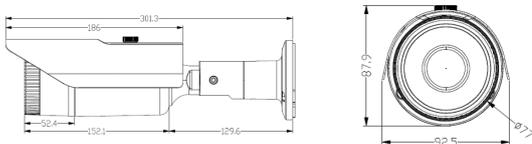

### CAMERA

|                      |                                 |
|----------------------|---------------------------------|
| Image Sensor         | 1/2.8" Sony CMOS Sensor, IMX335 |
| Total Pixels         | 2704 x 2104 (5.69 MP)           |
| Effective Pixels     | 2592 x 1944 (5.03 MP)           |
| Scanning Mode        | Progressive Scan                |
| Minimum Illumination | Color: 0.1 Lux   B&W: 0.01 Lux  |
| S/N Ratio            | More than 50dB (AGC off)        |

### LENS & IR LED

|                |                          |
|----------------|--------------------------|
| Lens Type      | Motorized Varifocal Lens |
| Focal Length   | 2.7-13.5mm               |
| Aperture Ratio | F1.4                     |
| IR LED         | -                        |

### CAMERA FUNCTIONS

|                       |  |
|-----------------------|--|
| Wide Dynamic Range    | Digital WDR  |
| Day and Night Mode    | Automatic, Day, Night, External Sync                                   |
| Noise Reduction       | 2D-NR, 3D-NR   |
| Auto Exposure Mode    | Automatic, Manual  |
| Shutter Speed Control | 1/100,000 - 1/2 sec  |
| Auto White Balance    | Auto, Outdoor, Shade, Clear sky, Fluorescent light, Light Bulb, Manual |
| Digital Zoom          | 16x  |
| BLC                   | On / Off   |
| HLC                   | On / Off   |
| Tamper                | On / Off   |

### NETWORK

|                     |  |
|---------------------|--|
| Video Compression   | H.264 / H.265 / MJPEG  |
| Video Resolution    | 2592 x 1944, 2560 x 1920, 2048 x 1536, 1920 x 1440 ..... 480 x 360                             |
| Video Frame Rate    | 2592 x 1944 @ up to 30 fps   |
| Video Streaming     | Simultaneously H.265, H.264, MJPEG, Independent Frame Rate and Bandwidth Control, VBR/CBR Mode |
| Protocols           | TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, FTP, UPnP, RTP, RTSP, TRCP, DHCP, ARP, Zeroconf          |
| Client Software     | Built in Web, ONVIF Compatible 3rd Party VMS   |
| Security            | Multi user Authority, IP Filtering, HTTPS  |
| Max User Connection | 10 Users   |
| Network Time Sync   | Synchronize Computer / NTP Server, Manual  |
| Software Reset      | Restart, Reset, Factory Default  |
| Remote Upgrader     | Using Web Browser  |
| Ethernet            | RJ-45 (10/100 Base-T)  |
| SDK Support         | API, ONVIF Profile S/T Compliant   |

### GENERAL

|                       |   |
|-----------------------|---|
| Power Source          | DC 12V (+/-) 10%, PoE IEEE802.3af, Class3 |
| Power Consumption     | 240mA + 80mA (2 Motor Lens)               |
| Operating Temperature | -10°C - +50°C / 0% - 90% RH               |
| Dimension             | Ø77mm x 301mm (L)                         |