

2MP BULLET Camera

VIBMC-1D71P24T




Features

- 1/2.9" Sony STARVIS CMOS Sensor
- IMX323
- ISP - EN771T
- Progressive Scan
- 1920 (H) X 1080 (V)
- AHD | TVI | CVI | CVBS
- HD-SDI | EX-SDI | CVBS
- Color : 0.09 Lux | B&W : 0.009 Lux | IR LED on : 0 Lux
- AHD : Pelco-C (ACP), TVI : Hikvision-C, CVI : HD-CVI or OSD Control

Physical

- 2.8mm ~ 12mm Manual V/F Lens
- IR LED X 24pcs
- Aluminum Die Casting
- White Color (Option : Dark Grey)
- 65mm Diameter

Dimensions

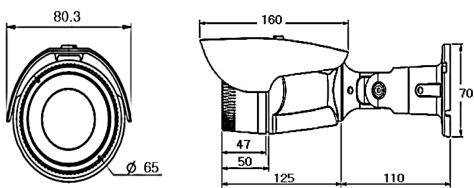

VIBMC-1D71P24T	
CAMERA	
Image Sensor	1/2.9" 2.1 Megapixel Sony CMOS Sensor
ISP	EYENIX EN771T
Scanning System	Progressive Scan
S/N Ratio	More than 50dB
Number of Effective Pixels	1920 X 1080 = 2,073,600 (Pixel)
Total Number of Pixels	2024 X 1138 = 2,303,312 (Pixel)
Video Output Mode	AHD TVI CVI CVBS
Video Output Resolution	2MP (16:9) - 1920 X 1080 25fps / 30fps
Minimum Illumination	Color : 0.09 Lux B&W : 0.009 Lux IR LED on : 0 Lux
Coaxial Communication	AHD : Pelco-C (ACP), TVI : Hikvision-C, CVI : HD-CVI or OSD Control
LENS & IR LED	
Lens Type	Manual V/F Lens
Focal Length	f = 2.8mm ~ 12mm
Aperture Ratio	F = 1.4
IR LED	850mm X 24pcs
CAMERA FUNCTIONS	
OSD	Built in
Electronic Shutter Speed	Auto / Flickerless / Manual
	NTSC : 1/30 sec ~ 1/30,000 sec
	PAL : 1/25 sec ~ 1/25,000 sec
AGC	1 ~ 10 Step
Sens Up	Off / X2 ~ X32
ACE (D-WDR)	Off / Low / Middle / High
Defog	Off / Low / Middle / High
Backlight Compensation	Off / HLC / BLC / WDR
White Balance	Auto / Auto EXT / Preset / Manual
Day & Night	Auto / Color / B&W / External
DNR	Off / Low / Middle / High
Focus Adjustment	Off / On
Motion Detection	Off / On (4 Zone)
Privacy Masking	Off / On (16 Zone)
Gamma	0.45 / 0.55 / 0.65 / 0.75
Language	Off / On
GENERAL	
Supplied Voltage	Power Superposition (S&M Multiple Power Supply) External Input : DC 12V
Power Consumption	IR LED Off : 100mA IR LED on : 300mA
Operating Temperature	-10°C ~ + 50°C / 0% ~ 90% RH
Dimension	135mm X 65mm Diameter
Weight	0.7kg